



# Instant Hot Water Dispensers

## Model HWT-HP

### High Performance Steaming Hot Water Tank

Chosen by Professional Coffee Shops for Proven Performance

Stainless Steel Tank dispenses near-boiling 210°F (99°C) water instantly

Water dispenser and filtration sold separately




### Submittal Sheet

- 1300 watt heating element for rapid recovery
- Electronic thermostat with  $\pm 2^\circ\text{F}$  ( $\pm 1^\circ\text{C}$ ) tight temperature control
- Provides 100 cups/hour of 210°F (99°C) near-boiling water
- 2/3-gallon stainless steel tank
- Easy to adjust temperature control
- Tool-free tank connections and dry start protection to ease installation
- 115 volts, 1300 watts, 11.3 amps
- For use with InSinkErator or authorized OEM instant hot water dispensers (excluding model Hot1)

### Specifications

Capacity	2/3-gallon stainless steel tank dispenses 100 cups of 210°F (99°C) water per hour
Electrical	115 volts, A.C., 1300 watts, 11.3 amp heating element with grounded three (3) prong plug
Thermostat	Electronic, adjustable from 190°F to 210°F (88-99°C) (factory pre-set at 205°F, 96°C)
Insulation	Meets U.L. 94HF-1 flammability specification
Recommended Supply Pressure	25-125 psi
Shipping Weight	Approximately 5.7 lbs.

### Dimensions

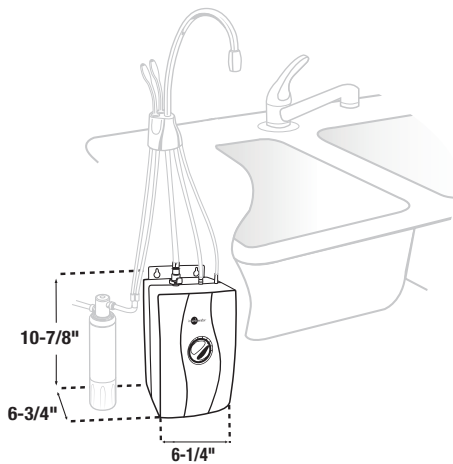

### Sample Specification

Instant hot water dispenser(s) shall be equipped with an InSinkErator Model HWT-HP stainless steel tank with adjustable temperature from 190°F to 210°F (88-99°C).

**We Come To You® 3-Year In-Home Limited Warranty\***

\* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.

US Pat. D532,497 (tank enclosure)

### Job Specifications



USA  
1-800-558-5700  
www.insinkerator.com

Canada  
1-800-561-1700  
www.insinkerator.ca



The Emerson logo is a trademark and a service mark of Emerson Electric Co. InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.